


(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11)

EP 0 977 139 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.02.2000 Bulletin 2000/05

(51) Int. Cl. 7: G06K 7/00

(21) Application number: 98114319.1

(22) Date of filing: 30.07.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: **Martucci, Roberto**  
35036 Montegrotto Terme Padova (IT)


(74) Representative:  
**Zwirner, Gottfried, Dipl.-Ing. Dipl.-W.-Ing.**  
**Blimbach, Kramer & Partner,**  
Alexandrastrasse 5  
65187 Wiesbaden (DE)

(71) Applicant: **MOLEX INCORPORATED**  
Lisle Illinois 60532 (US)

### (54) IC Card Connector

(57) An IC card connector (1) is provided for connecting an IC card (4) having a terminal array (5) to external equipment. The connector includes a base member (2) having a plurality of electrically conductive contacts (16, 17) exposed on one side of the base member (2) for engaging the terminal array of the IC card (4). A cover (3) is hinged to the base member for movement toward and away from the one side of the base member (2). The cover has a receptacle for securing the IC card (4) thereon for pivotal movement therewith and a sliding movement of the IC card (4) relative to the cover in a direction perpendicular to the axis of rotation. Pivoting of the cover (3) onto the base member (2) of the IC card (4) effects engagement of the IC card terminal array (5) with the plurality of contacts (16, 17) and a sliding movement of the IC card (4) relative to the cover (3) locks the IC card (4) and the cover (3) in the closed position of

the connector (1).

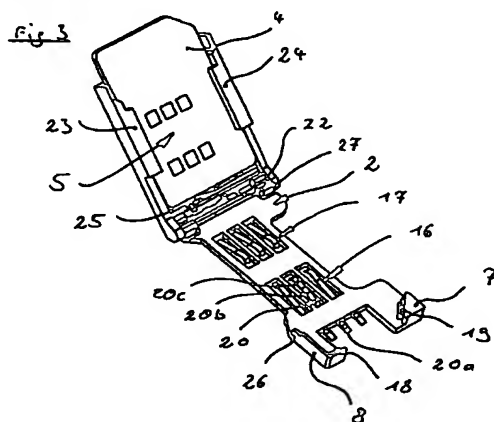

EP 0 977 139 A1

**Description****Field of the Invention**

**[0001]** This invention generally relates to the art of electrical connectors and, particularly, to an IC card connector for connecting an IC card, especially a SIM card, in an IC card reader system in a cellular phone or the like.

**Background of the Invention**

**[0002]** IC cards have been developed and contain IC's (integrated circuits) including memory circuits, such as rams (random access memories), and control circuits, such as CPUs (central processing units). A special type of IC card, called a SIM card (subscriber identification module card) is of increasing interest and used in cellular phones as an identification and storage unit for subscriber related data. SIM cards normally include a terminal array for connection through a card reader system to the external equipment. The connector usually includes some form of IC card socket and a plurality of electrodes or contacts exposed in the socket for engaging the terminal array of the IC card. The card is inserted and removed from the socket, and the connector contacts are resilient or comprise springy contacts for yieldably engaging the terminal array of the card when the card is inserted into the socket.

**[0003]** With the ever-increasing miniaturization of IC cards and their respective connectors, various problems continue to arise. For instance, the very handling of the miniature IC cards is difficult, and proper positioning of the cards in the connector presents corresponding problems when the card is inserted into and removed from the card-receiving cavity or other receptacle means of the connector. In addition, the terminal array on the card can become contaminated or soiled which can result in incomplete connections between the terminal array on the card and the contacts of the connector which, in turn, results in incomplete or intermittent connections to the external equipment.

**[0004]** US 5,320,552 teaches a contacting apparatus for an integrated IC chip card having a rotatable cover accommodating a chip card. The cover is movable relative to the chip card which is accommodated in the cover. It is intended to prevent any relative movement between the chip card and the contact elements of a base member when the cover is moved to the locking position. However, any contamination on the contacts of the base member or the chip card, e.g. as occurring during normal use from dirt, contaminants, oxidation or due to touching the contacts by the user, may cause a deterioration of the electrical properties of the contacts.

**[0005]** From EP 0 515 897 a chip card connector is known comprising means for locating the chip card in the inserted position and further locking means for holding the chip card in a locked reading position oriented parallel to a base member carrying contact elements for contacting the chip card. The connector is relatively simple to manufacture as there is no cover and generally only one base element securing the contact elements and accommodating the inserted chip card, but, as the locking means extend along the foremost edge of the inserted chip card, it is difficult to grip and remove the inserted chip card from the connector.

**[0006]** This invention is directed to solving the above problems in a miniature SIM card connector which is providing a reliable contact between IC card and connector and is simple to manufacture and assemble.

**Summary of the Invention**

**[0007]** An object, therefore, of the invention is to provide a new and improved IC card connector for connecting an IC card having a terminal array, in an IC card reader system or the like.

**[0008]** In the exemplary embodiment of the invention, the IC card connector includes a base member having a plurality of electrically conductive contacts exposed on one side thereof. A cover is hinged to the base member for movement toward and away from the one side. The cover has receptacle means for securing the IC card thereon, whereby closing the cover onto the base member effects engagement of the IC card terminals with the contacts on the base member. According to the invention, said receptacle means hold the IC card for pivotal movement therewith and for sliding movement of the IC card relative to the cover in a direction perpendicular to the axis of rotation. A sliding movement of the IC card relative to the cover is apt to lock and unlock the IC card together with said cover in the closed position of the connector.

**[0009]** In the preferred embodiment of the invention, the IC card is moved relative to the contacts of the base member due to the sliding movement during opening and closing of the cover wiping away any contamination on the contacts. Thus a reliable and undisturbed contact is ensured over an extended time of use.

**[0010]** In a further preferred embodiment, the connector comprises locking elements formed at the base member and extends in the closed position of the connector over a portion of a foremost edge of an inserted IC card, whereby the major part of the foremost edge of the inserted IC card is not covered by the locking elements. Thus, a user easily may grip the remaining uncovered part of the foremost edge of the IC card and force the IC card to an unlocked position.

**[0011]** The locking elements may be wedge-type providing a snap-in locking mechanism in cooperation with said foremost edge of the IC card, which also permits closure of the connector. It only is necessary to close the cover with the inserted IC card until a click is heard or a tactile signal is encountered indicating the closed position of the connector.

**[0012]** In a preferred embodiment, the connector comprises means for applying an elastic force to the IC card generally in the direction of said sliding movement of the IC card and said means comprise an arm formed at the

cover extending generally parallel to the axis of rotation.

[0013] The IC card connector further may include a friction device providing an increased mechanical tilt resistance in the closed position of the cover, so that the cover may be held in the closed position, even without an inserted and locked IC card. Advantageously, said friction device comprises a lateral projection formed at the base member and, in the closed position, engages a lateral flange portion of the cover.

[0014] The IC card connector may also include integrally formed snap-in hinge means for pivotally mounting said cover relative to said base member.

[0015] In a further preferred embodiment of the invention, the cover and the base member, respectively, are provided as a unitarily molded component of dielectric material such as plastic or the like. The cover has flanges providing means for slidably receiving the IC card in an edge-wise fashion.

[0016] The card reader system may include a printed circuit board and, in such an application, the base member is illustrated herein as including means, i.e. mounting pegs, for mounting the base member to the printed circuit board with the contacts engageable with circuit traces on the board. The contacts have resilient portions exposed on the one side of the base member for engaging the terminal array of the IC card.

[0017] Other objects, features and advantages of the invention will be apparent from the following detailed description taken in connection with the accompanying drawings.

#### Brief Description of the Drawings

[0018] The features of this invention which are believed to be novel are set forth with particularity in the appended claims. The invention, together with its objects and the advantages thereof, may be best understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements in the figures and in which:

FIGURE 1 is a perspective view of a closed IC card connector seen from above and embodying the concepts of the invention, illustrating an IC card being inserted into the cover of the connector;

FIGURE 2 is a perspective view of the opened IC card connector seen from behind, illustrating an IC card being inserted edge-wise into the cover of the connector;

FIGURE 3 is a perspective view of the opened IC card connector seen from above, illustrating an IC card being inserted edge-wise into the cover of the connector;

FIGURE 4 is an elevational plan view seen from a side and showing the connector with an inserted IC card in a fully opened position;

FIGURE 5 is an elevational plan view from above showing a connector being closed without an inserted SIM card;

FIGURE 6 is a side plan view showing the inventive connector in its closed position; and

FIGURE 7 is a plan view seen from the rear and showing the inventive connector in its closed position;

#### Detailed Description of the Preferred Embodiment

[0019] Referring to the drawings in greater detail, and first to Figure 1, the concepts of the invention are embodied in an IC card connector, generally designated 1, which is extremely simple and includes two basic components, namely a base member, generally designated 2, and a cover, generally designated 3. As described in greater detail hereinafter, Figure 2 shows an IC card 4 inserted into cover in the direction of arrow "A".

[0020] The IC card 4 is a miniature card of conventional or known construction and includes a terminal array 5 on the bottom side thereof (see Figure 3). In a most preferred embodiment the IC card 4 is a SIM ("Subscriber Identification Module") card as used in cellular phones for identification and storage of subscriber related data.

[0021] Referring to Figure 2 in conjunction with Figure 3, base member 2 includes a generally flat base portion 6 having raised areas or wall and boss portions 7, 8 at the front end thereof. The rear part of base member 2 at the rear end of flat portion 6 supports hinge means 9 mounting cover 3 pivotally to base member 2. Hinge means 9 include two pairs of upwardly projecting portions 10, 11 and hook or snap-fit portions 12 at the end thereof are shown in Figures 2 and 3 in more detail.

[0022] Cover 2 is held pivotally in the direction of the axis of rotation (shown as double headed arrow "B" in Figure 2) by hinge means 9.

[0023] A plurality of mounting pegs 14, 15 depend from the underside of base portion 6 as shown best in Figures 4, 6 and 7 for mounting in appropriate mounting holes in a printed circuit board (not visible in the appended drawings), for instance. Each mounting peg 14, 15 may have a different diameter to ensure correct mounting on the printed circuit board.

[0024] Lastly, a plurality of contacts, generally designated 16, 17 on base member 2, is mounted in base member 2 as will be described in greater detail hereinafter, whereby portions of the contacts are exposed on the top side of the base member 2 as can be seen in Figures 2, 3 and 4.

[0025] Referring to Figures 2 and 3, raised areas 7 and 8 include wedge-shaped projections 18, 19 which define respective locking means for portions of the foremost edge of an inserted IC card 4. Projections 18, 19 are located at the two foremost sides of base member 2 and extend in the closed position of the connector 1 over two small portions of the foremost edge of an inserted IC card 4. The middle portion of the foremost edge of an inserted IC card 4 is not covered and can be gripped by a user.

[0026] Base member 2, therefore, includes all of the elements described above, including upwardly projecting portions 10, 11 having associated hook or snap-fit portions 12, 13 locking projections 18, 19 and mounting pegs 14,

EP 0 977 139 A1

15 and is fabricated of a unitarily molded single component of dielectric material, such as plastic or the like.

[0027] Referring to Figures 2 and 3 in conjunction with Figure 4, Figure 2 and 3 show perspective views of base member 2 and Figure 4 shows a plan view of the side of base member 2. These figures best illustrate the configuration and mounting of the plurality of contacts 16, 17 on the base member 2. More particularly and described with reference to contact 20 shown in Figure 3, each contact includes a generally horizontal leg held within base member 2 terminating at one end in an outside printed circuit board contact portion 20a. The contacts are formed with a resilient or springy leg 20b which is formed such that the resilient leg 20b projects upwardly beyond the top surface of the base member 2 so as to be exposed on the top side thereof and terminates in a card contact portion 20c.

[0028] Each contact of the plurality of contacts 16, 17 is held in the base member 2 by injection molding, e.g. insert molding, whereby the dielectric material of base member 2 encloses the horizontal leg of the respective contact. The base member 2 is shown in Figure 3 as being of generally rectangular shape mounting contacts below the terminal array 5 of IC card 4. The outside ends 20a of the above-described contacts are adapted to contact the external circuitry of an underlying printed circuit board.

[0029] When the plurality of contacts 16, 17 is properly held within base member 2, and base member 2 is properly mounted to the printed circuit board, outside end 20a of each contact is maintained in surface contact with appropriate circuit traces on the surface of the printed circuit board.

[0030] Referring to Figures 2 and 3 in conjunction with Figure 5, cover 3 is a one-piece component fabricated of molded dielectric material, such as plastic or the like. The cover includes a thin, flat body 21 and a rear hinge pin 22 extending transversely of the body 21 and within upwardly projecting portions 10, 11 of base member 2. A pair of side flanges 23, 24 is formed to be spaced slightly from an inside surface of the body 21 and a flexible rear arm 25 is formed at the rear of cover 3. Flanges 23 and 24 project toward the middle of the body 21 to define receptacle means for an IC card 4 between the inside surface of body 21 and inside surfaces of flanges 23 and 24. The IC card 4 is inserted edge-wise prior to use in the direction of arrow "A" between side flanges 23 and 24 of the cover 3 in the opened position of connector 1 as shown in Figure 3 until a leading edge of the IC card abuts the flexible rear arm 25 of the cover 3.

[0031] In assembly of cover 3 to base member 4, hinge pin 22 of the cover 3 is seated into portions 10, 11 of base member (see Figures 2 and 3) and pressed downwardly in a way that a snap-fit mounting is obtained.

[0032] After insertion, the cover may be pivoted downwardly in the direction of arrow "C" (Figure 4) and a friction device formed by a lateral projection 26 of base member 2 in the closed position of cover 3, makes contact with a foremost portion of side flange 23 of cover 3. In this completely downwardly pivoted position, the friction device provides for an increased mechanical tilt resistance holding the cover 3 on base member 2 even without an inserted IC card.

[0033] When an IC card 4 is inserted into cover 3 and cover 3 is pivoted in the direction of arrow "C" (shown in Figure 4) the foremost lateral edge portions of IC card 4 makes contact with the wedge-type shaped locking elements 18, 19. The IC card is urged by means of the wedge-type shaped locking elements 18, 19, against the elastic force applied to the IC card by rear arm 25, in a direction perpendicular and the axis of rotation. To reach the final closed position of cover 3, flexible rear arm 25 biases IC card 4 in a direction toward raised areas 7, 8. As a result, a snap-in locking mechanism is provided by projections 18, 19 in cooperation with said foremost lateral edges of the IC card 4.

[0034] If IC card 4 is inserted erroneously, such as upside-down or backward, and cover 3 is pivoted in the direction of arrow "C" shown in Figure 4, raised area 7 makes contact with a lateral foremost edge of IC card 4 and blocks further closing movement of cover 3 and IC card 4. Consequently, the triangular cross sectional shape of raised area 7 also functions as polarizing means.

[0035] During the before-mentioned sliding movement of IC card 4 held in cover 3 relative to base member 2, contact array 5 is displaced relative to the plurality of contacts 16, 17 causing a sliding and wiping motion of contacts of array 5 relative to the plurality of contacts 16, 17.

[0036] In this closed position of rear arm 25 of cover 3, a slider 27 (see Figures 1 and 3), which is slidably held on hinge pin 22 can be moved from its first, unlocked position at the right side of hinge pin 22, to a second, locked position at the left side of hinge pin 22. In the second, locked position, slider 27 inhibits movement of arm 25 in a direction toward the axis of rotation, i.e. in the direction of the sliding movement of IC card 4.

[0037] In the second position of slider 27, a lateral projection 28 of arm 25 extends into a recess 29 of slider 27 latching slider 27 and locking arm 25 in the closed position of connector 1. In this double-locked position, IC card 4 can not be moved out of engagement with projections 18, 19 as IC card 4 abuts rear arm 25 and rear arm 25 abuts slider 27 in a direction toward the axis of rotation. As a consequence, external vibrational forces are unable to open connector 1 in its double-locked position.

[0038] To remove IC card 4 from connector 1, slider 27 is moved from its locked position shown in Figure 1 to its unlocked position shown in Figure 3. Then, IC card 4 is slidably moved against elastic forces applied by rear arm 25 in a direction toward the axis of rotation and projections 18, 19 move out of engagement with the foremost edge portions of IC card 4. In this position, elastic forces applied by the plurality of contacts 16, 17 of base member 2 to contact array 5 of IC card 2 tend to further pivot IC card 4 and cover 3 in a direction opposite arrow "C" of Figure 4. Further pivotal movement of cover 3 in the latter direction allows for gripping of the IC card 4 and removing the card from cover 3.

[0039] In handling, especially removing or inserting the card, an operator simply grasps the IC card 4 by its edges to preclude the possibility of touching the terminal array 5 of the IC card 4.

[0040] It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

# Claims

1. An IC card connector (1) for connecting an IC card (4) having a terminal array (5), comprising:
  - a base member (2) including a plurality of electrically conductive contacts (16, 17) exposed at least on one side of the base member (2) for engaging the terminal array (5) of the IC card (4); and
  - a cover (3) mounted on the base member (2) for pivotal movement toward and away from said one side thereof, the cover (3) having receptacle means (23, 24) for securing the IC card (4) thereon whereby closing of the cover (3) onto the base member (2) effects engagement of the IC card terminal array (5) with the contacts (16, 17, 20) on the base member (2) characterized in that
  - said receptacle means (23, 24) are adapted to hold the IC card (4) for a pivotal movement therewith and for a sliding movement of the IC card (4) relative to the cover (3) in a direction perpendicular to the axis of rotation and
  - a sliding movement of the IC card (4) relative to the cover (3) so as to lock and unlock the IC card (4) together with said cover (3) in the closed position of the connector (1).
2. The IC card connector of claim 1 comprising
  - locking elements (18, 19) formed at the base member (2) and extending over a portion of a foremost edge of the IC card (4) in the closed position of the connector (1).
3. The IC card connector of claims 1 and 2 wherein said locking elements (18, 19) comprise
  - projections (18, 19) extending from the base member (2) in a direction generally perpendicular to the axis of rotation of the cover (3).
4. The IC card connector of claims 1, 2 and 3 wherein said locking elements (18, 19) are wedge-type providing a snap-in locking mechanism in cooperation with said portion of the foremost edge of the IC card (4).
5. The IC card connector of any of claims 1 through 4 comprising means (25) for applying an elastic force to the IC card (4) generally in the direction of said sliding movement of the IC card (4).
6. The IC card connector of claim 5, wherein said means (25) for applying an elastic force comprise an arm (25) formed at the cover (3), which arm (25) extends generally parallel to the axis of rotation and abuts the rear edge of the IC card (4) if the IC card is fully inserted into the cover (3).
7. The IC card connector of one of claims 1 through 6 further comprising a friction device (26) providing an increased mechanical tilt resistance in the closed position of the cover to hold the cover (3) in the closed position.
8. The IC card connector according to claim 7 wherein said friction device (26) comprises a lateral projection (26) formed at the base member (2) and engaging a lateral flange portion (23) of the cover (3) in the closed position.
9. The IC card connector of any of claims 1 through 8 wherein said base member (2) forms a polarizing means (7) which inhibits closing of the cover (3) if the IC card (4) is inserted erroneously in the cover (3).
10. The IC card connector of one of claims 1 through 9 wherein said receptacle means (23, 24) of the cover (3) comprises
  - recesses formed by lateral flanges (23, 24) of the cover (3) extending generally perpendicular to the axis of rotation and adapted to accommodate said IC card (4) on an inside surface of the cover (3) facing the base member (3).
11. The IC card connector of one of claims 1 through 10 further comprising mounting pegs (14, 15) formed at the bottom side of the base member (2).

**EP 0 977 139 A1**

12. The IC card connector of any of claims 1 through 11 comprising snap-in hinge means (10, 11, 22) for pivotally mounting said cover (3) relative to said base member (2).

13. The IC card connector of claim 13 wherein said snap-in hinge means comprise a hinge pin (22) formed at the cover (3) and upwardly projecting portions (10, 11) having hook portions (12, 13) defined by said base member (2) for receiving said hinge pin.

14. The IC card connector of any of claims 1 through 13 comprising further locking means (27) adapted to inhibit sliding movement of the IC card in the closed position of the connector (1).

15. The IC card connector of claim 14 wherein said further locking means (27) comprise a slider (27) held at said hinge pin (22) of the cover (3),

said slider (27) being adapted to be moved between a first unlocked position and a second locked position, inhibiting movement of the arm (25) in said second locked position.

16. The IC card connector of any of claims 1 through 15 wherein said base member (2) is generally flat and a major part of said cover (3) is relative thin.

17. The IC card connector of any of claims 1 through 16 wherein said cover (3) and said base member (2), respectively, are fabricated of unitarily molded plastic material.

Fig. 1

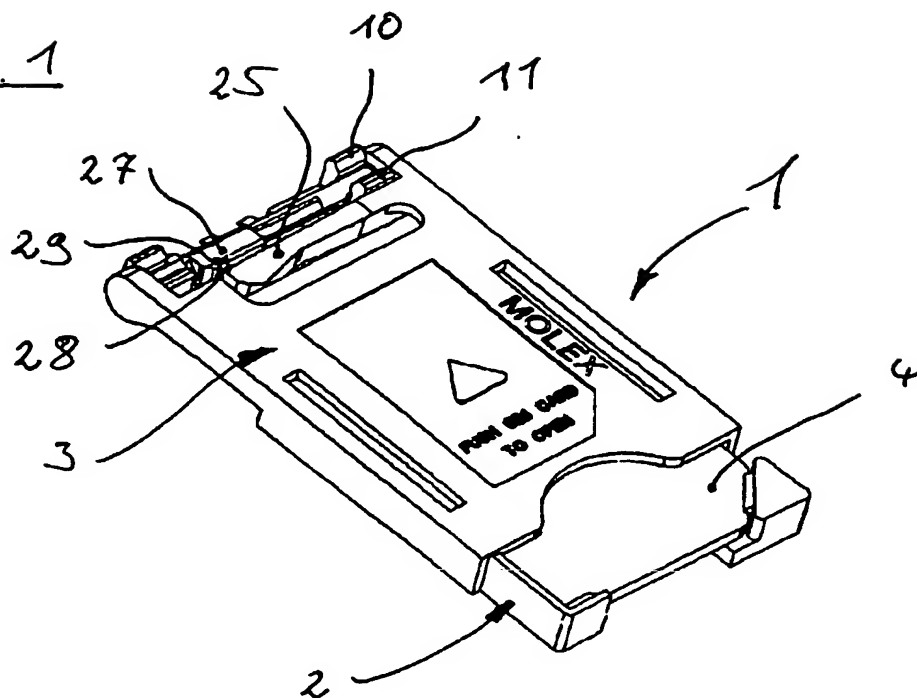


Fig. 2

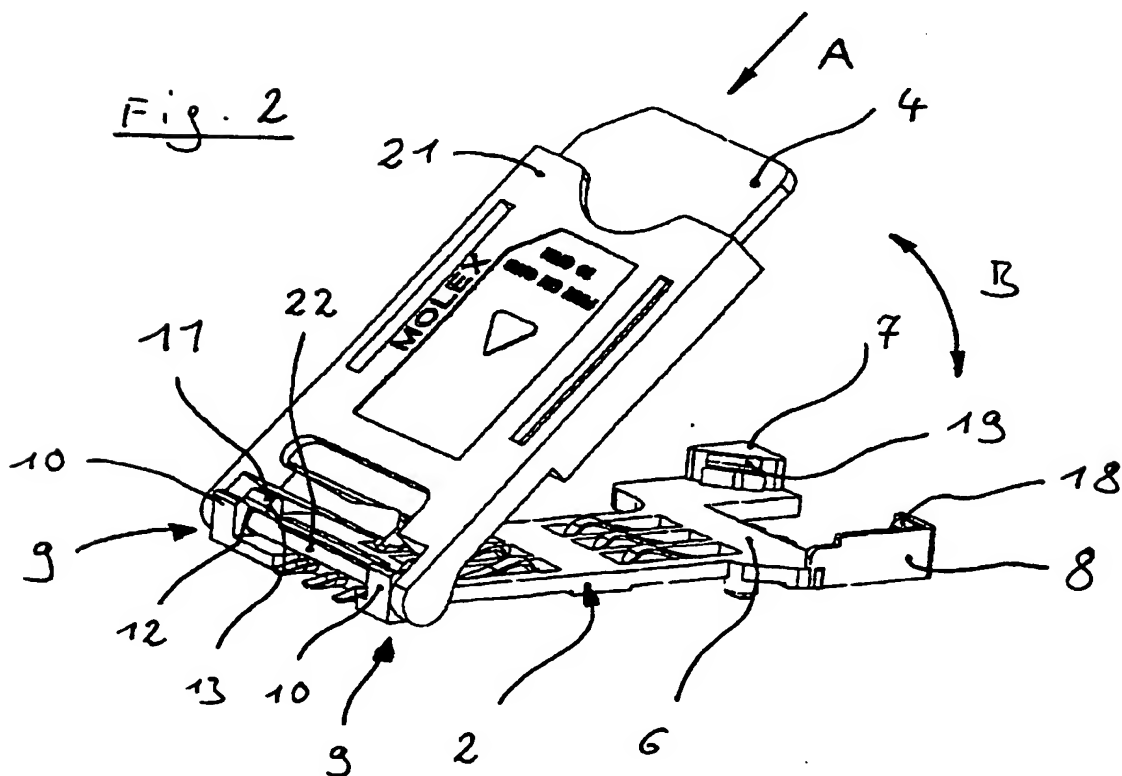


Fig 3

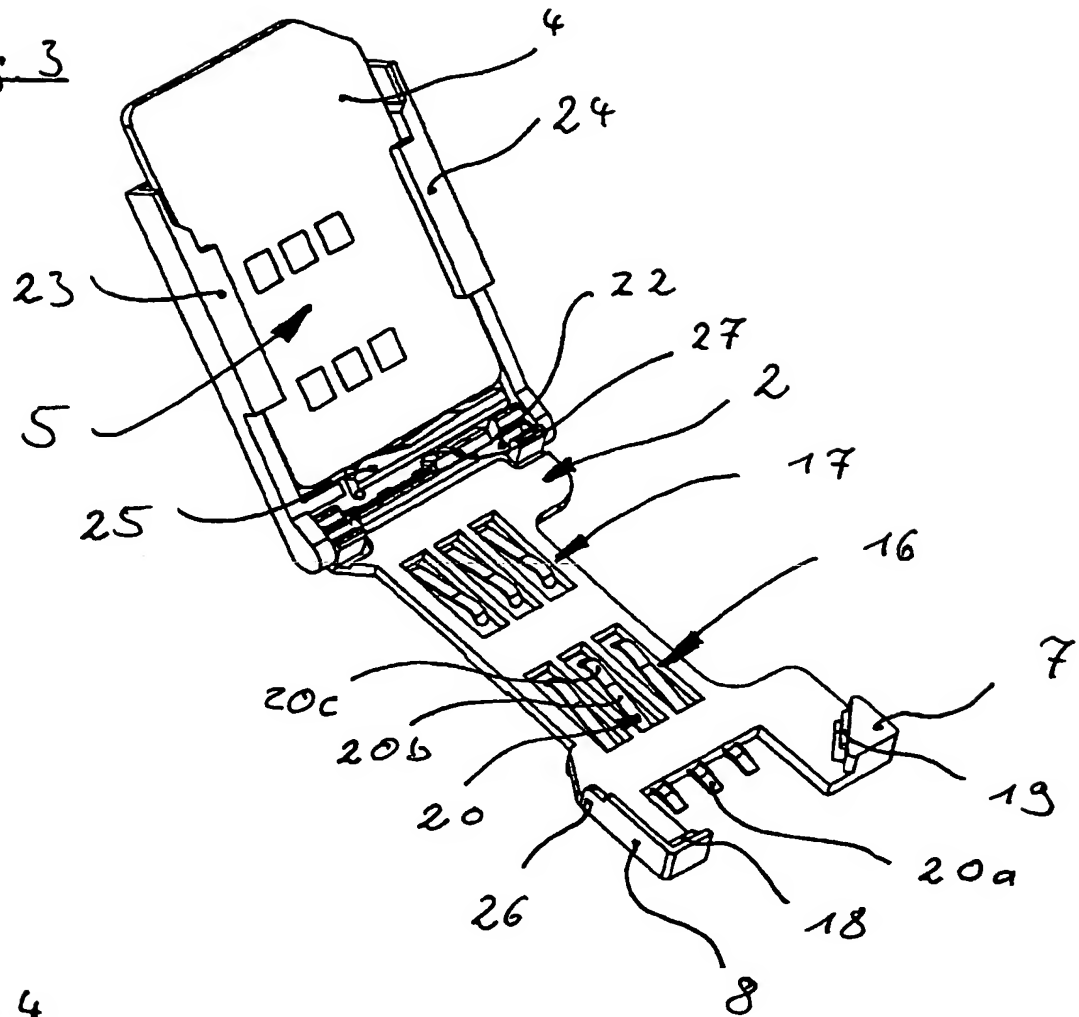


Fig. 4

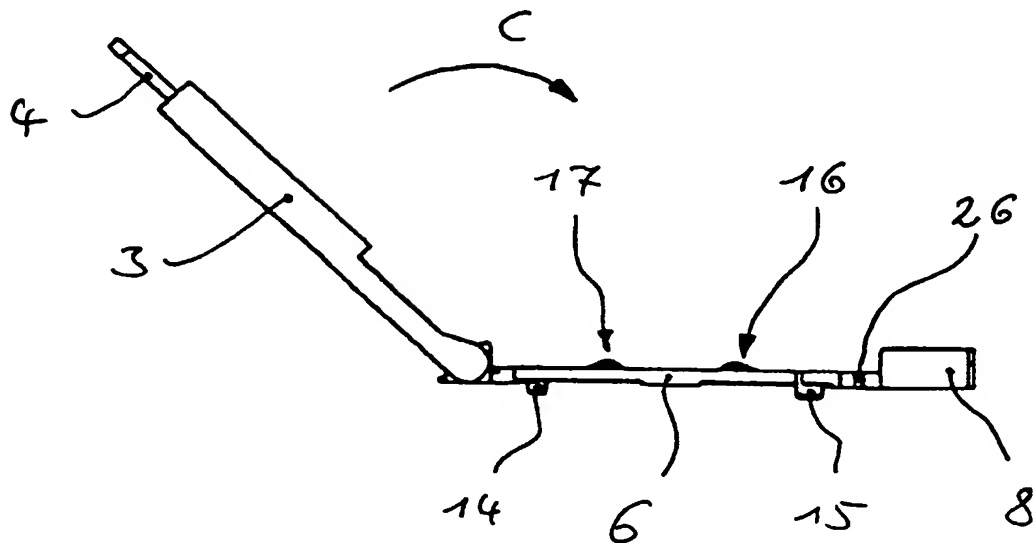




Fig. 5

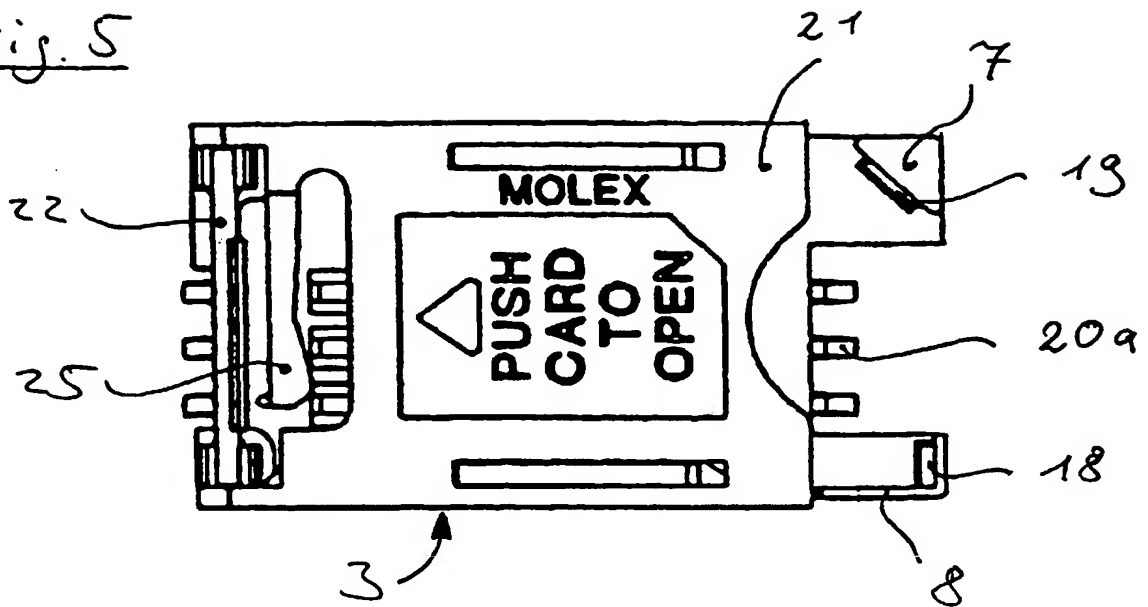


Fig. 6


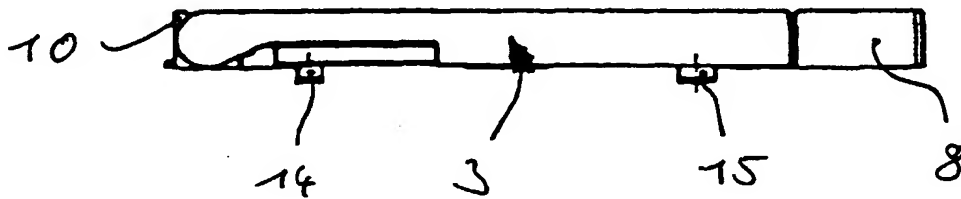


Fig. 7



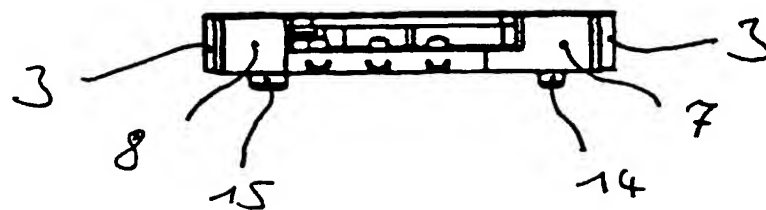

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 98 11 4319

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 840 246 A (AMPHENOL TUCHEL ELECT) 6 May 1998 * column 5, line 47 - column 7, line 37; claims; figures *	1	G06K7/00
D,A	EP 0 515 897 A (CIT ALCATEL) 2 December 1992 * column 5, line 49 - column 8, line 1; figures *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 594 (E-867), 27 December 1989 & JP 01 248769 A (OLYMPUS OPTICAL CO LTD), 4 October 1989 * abstract *	1	
D,A	US 5 320 552 A (REICHARDT MANFRED ET AL) 14 June 1994 * column 3, line 33 - column 6, line 43 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06K
Place of search THE HAGUE		Date of completion of the search 28 January 1999	Examiner Gélébart, Y
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P4/C01)

**EP 0 977 139 A1**  
**ANNEX TO THE EUROPEAN SEARCH REPORT**  
**ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 4319

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-01-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0840246 A	06-05-1998	DE 19734424 A	07-05-1998
		JP 10171948 A	26-06-1998
EP 0515897 A	02-12-1992	FR 2676566 A	20-11-1992
		AU 653807 B	13-10-1994
		AU 1594192 A	19-11-1992
		DE 69213555 D	17-10-1996
		DE 69213555 T	23-01-1997
		ES 2093137 T	16-12-1996
		JP 5197842 A	06-08-1993
		NZ 242604 A	26-10-1994
		US 5224873 A	06-07-1993
US 5320552 A	14-06-1994	DE 59105915 D	10-08-1995
		WO 9115101 A	03-10-1991
		EP 0447741 A	25-09-1991
		EP 0472692 A	04-03-1992
		JP 5502959 T	20-05-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82